

8

7

6

5

4

3


201904

1


THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS CONFIDENTIAL AND PROPRIETARY AND IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE EXPRESSED WRITTEN PERMISSION OF MULTQUIP COMPANY.

ZONE		LTR	DESCRIPTION	DATE	APPROVED


CONTROL PANEL	
NO.	NAME
1	FREQUENCY METER
2	AC AMMETER
3	AC VOLTMETER
4	VOLTAGE REGULATOR
5	AC CIRCUIT BREAKER (FOR MAIN)
6	AC CIRCUIT BREAKER (FOR 5-20R)
7	AC CIRCUIT BREAKER (GFCI FOR L5-30R)
8	AC CIRCUIT BREAKER (FOR L6-30R)
9	AC CIRCUIT BREAKER (FOR CS6369)
10	STARTER SWITCH
11	HOUR METER
12	SPEED CONTROL SWITCH
13	WARNING LAMP UNIT (OIL PRESS., WATER TEMP., CHARGING, PRE-HEAT)
14	1-PHASE OUTPUT TERMINAL (1 PHASE, 3 WIRES) U.N.V. (120/240V)
15	OUTPUT RECEPTACLE 120V 20A NEMA 5-20R (GFCI)
16	OUTPUT RECEPTACLE 120V 30A NEMA L5-30R
17	OUTPUT RECEPTACLE 240V 30A NEMA L6-30R
18	OUTPUT RECEPTACLE 120/240V 50A NEMA CS6369
19	GROUND TERMINAL (FOR G.F.C.I.)
20	GROUND TERMINAL (FOR BONNET)

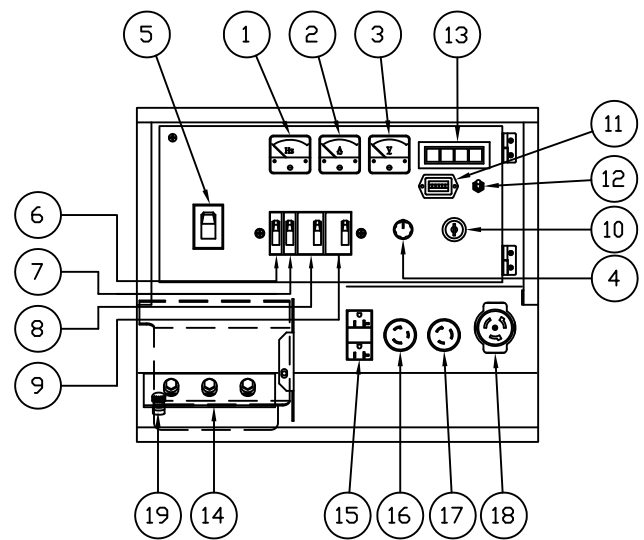


CONTROL AND OPERATING PANEL

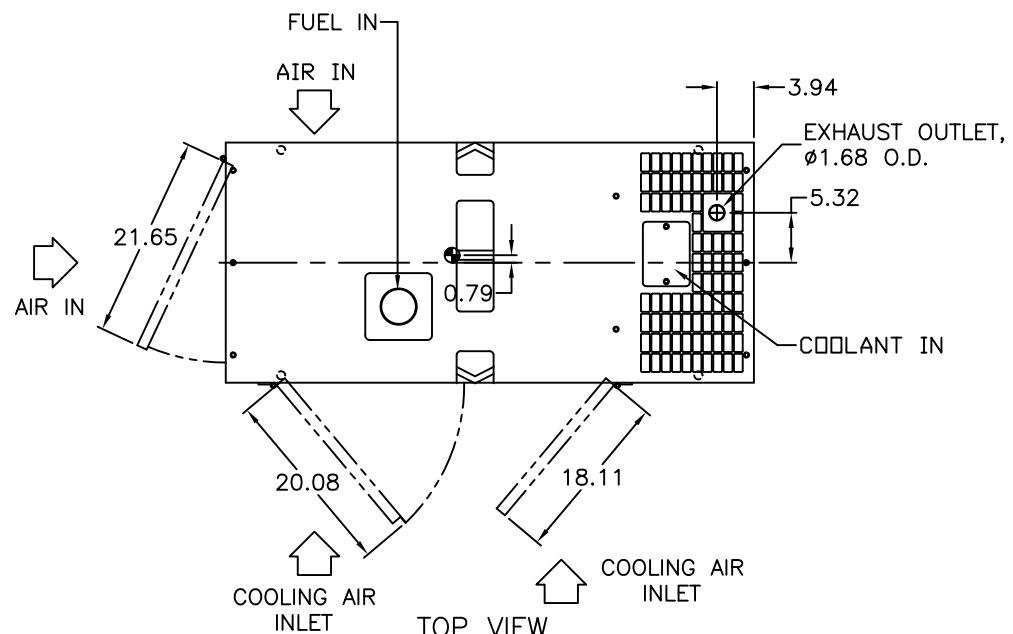


TOP VIEW

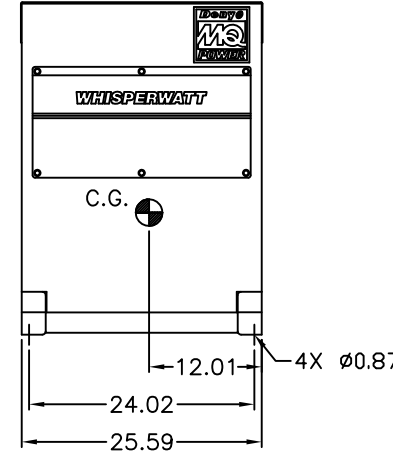


FRONT VIEW

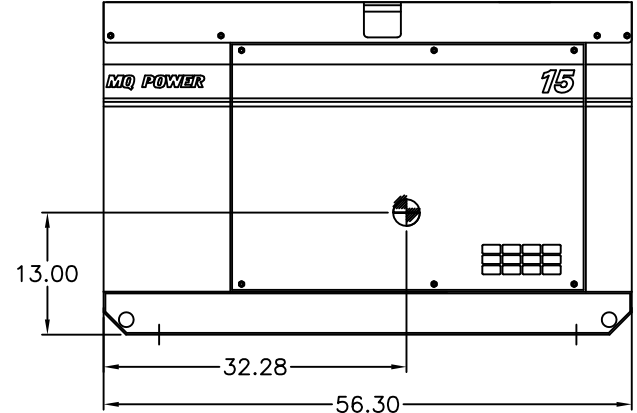

LEFTRSIDE VIEW

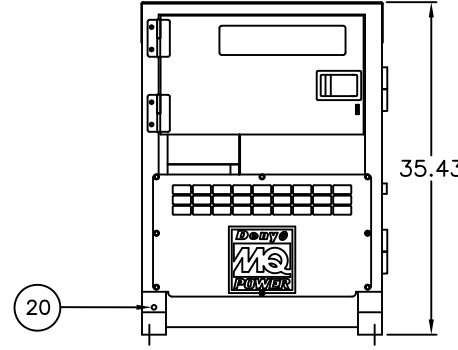

END VIEW

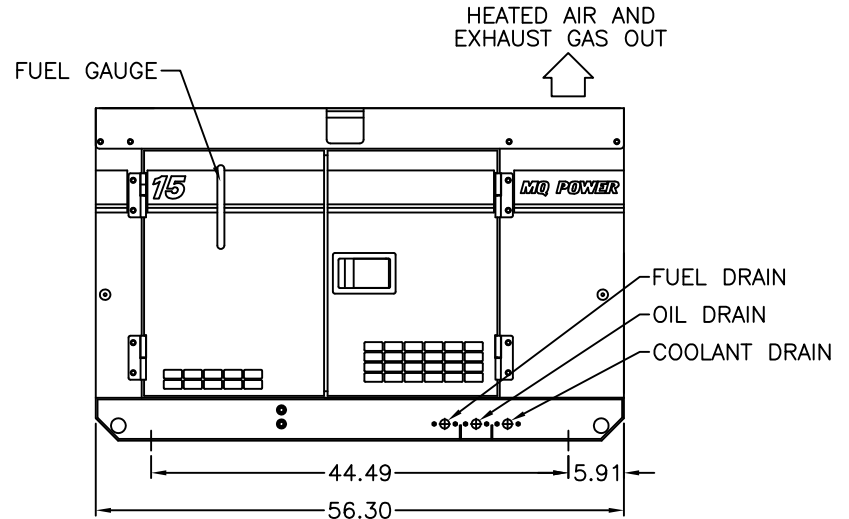

RIGHTSIDE VIEW

ENGINE	: KUBOTA D1503
GENERATOR	: DFS-0220XK
BATTERY SIZE	: 24 (CCA 0°F 650A) X1
FUEL TANK	: Approx. 16.5Gal. (62L)
DRY WEIGHT	: Approx. 1178lbs (535kg)
WET WEIGHT	: Approx. 1366lbs (620kg)
☉	: CENTER OF GRAVITY

(FUEL: HALF; OIL, COOLANT, BATTERY: FULL)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE :		CUSTOMER		MQ POWER		
FRACTIONS	DECIMALS	ANGLES	JOB NO.	TEL: (310) 537-3700/FAX: (310) 632-2856		
±	.XX ±	±	APPROVALS	18910 WILMINGTON AVENUE		
	.XXX ±		DATE	CARSON, CA 90746		
DERIVED FROM	MATERIAL	DRAWN		OUTLINE DRAWING		
REV	DATE	J. TRAN	01/10/14	DCA15SPXU4F		
CAD CODE	FINISH	CHECKED	SALESMAN	SIZE	FSCM NO.	DWG. NO.
201904	DO NOT SCALE DRAWING			D		201904
				SCALE		SHEET
				1/10		1 / 1

201904

8

7

6

5

4

3

2

1